





江苏通路新材料科技股份有限公司
Terou New Material Technology Co., Ltd

No.	Model No.	300 Series	500 Series	700 Series	1000 Series	1200 Series	1500 Series	2000 Series	3000 Series
1	Concentrated load kgf/6.45cm ² ≤2.0mm	300	500	700	1000	1200	1500	2000	3000
2	Ultimate load kgf/6.45cm ² ≤2.0mm	600	1000	1400	2000	2400	3000	4000	6000
3	Uniform load kgf/m ² ≤1.0mm	1000	1500	2100	3000	3600	4500	6000	9000
4	Open ratio	0%、50%	0%、17%、25%	0%、17%、25%	0%、17%、25%、50%	0%、17%、25%	0%、17%、25%、50%	0%、17%、25%	0%、17%、25%
5	Surface material	HPL、PVC with fireproof performance, SUS304 is optional Epoxy surface treatment							
6	Surface material ESD standards	Electrostatic conductive PVC: 10 ⁴ -10 ⁶ Ω & 10 ⁶ -10 ⁹ Ω							
7	Base material	Die casting Aluminum, ADC12							
8	Length/width tolerance	600+0.00mm / 600-0.20mm							
9	Thickness tolerance	±0.10mm							
10	Planeness tolerance	±0.20mm							
11	Diagonal tolerance	Max. 0.50mm							


ADD: No.33 Xingchen Road, Hengshanqiao Industrial Park, Changzhou, Jiangsu, China.

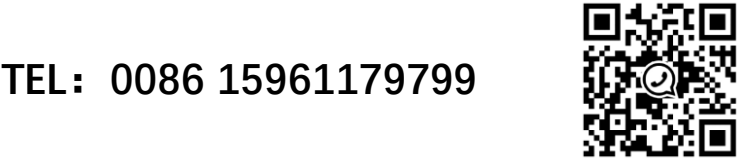

TEL: 0086 15961179799

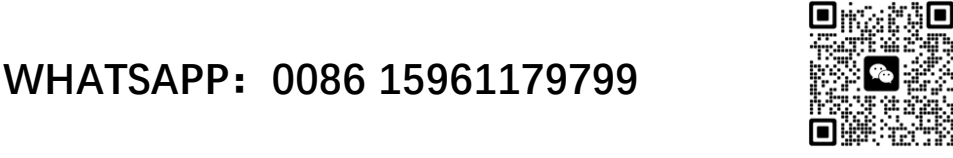

WHATSAPP: 0086 15961179799

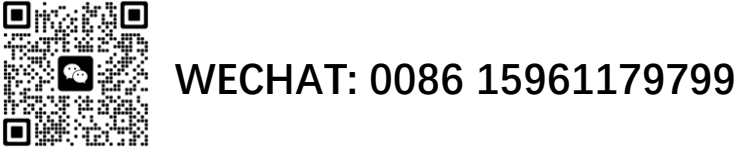

WECHAT: 0086 15961179799

WEB: www.tongluraisedfloor.com

EMAIL: andy@tongluraisedfloor.com